


ILS prides itself to build the highest quality lecterns around from thick aluminum profiles, blocks and plates, machined to a perfect fit and style. The lecterns are virtually free of maintenance for decades. In ILS products it is possible to remove a damaged part and renew it, or to make new fittings for future upgrades without affecting the rest of the installed system.

ILS Navigator QT-FD delivers ILS quality with a smart design and cost-efficient solution. The solid top of the lectern is placed on a motorized narrow pillar with a height adjustment range up to 40cm (15" +). Two buttons will help you to control it. In the lowest position a seated person can freely use the system.

At the top, the ILS Navigator QT-FD offers a 24" touch monitor with an integrated PC and the front display 27" placed at the front of the lectern (the audience side) is the perfect solution to display multiple logos at events and conferences. This solution also provides one fixed horizontal side table which makes possible the use of handwritten notes, a laptop or place a document camera on it. Casing and pedestal are all made of thick machined aluminium profiles, blocks and plates to last a lifetime and beyond.

Of course, the system comes with laptop connectivity for which there are 4 user definable Neutrik Style sockets available, it comes with charging features for any tablet of smart phone to use e.g. a timer app; one or two microphone shock-mounts, a reading light and an optional mute button feature. For mobility, the system comes on lockable casters, default 50mmØ for hard floors, or 75mmØ for thick carpets to facilitate moving the lectern around.

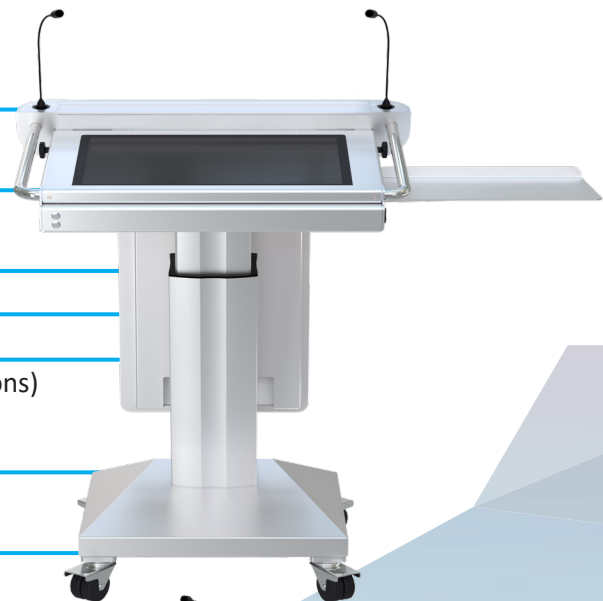

DIMENSIONS

Width	Top: 855mm x 535mm Side Table: 450mm x 295mm
Height	User side: min: 835mm max: 1230mm Audience side: min: 965mm max: 1360mm
Weight	75kg

INTEGRATION

Screen & PC	Monitor: 24" 10 points capacitive touchscreen (FHD, UHD options) PC: MFF PC: Dell OptiPlex, HP Mini, Lenovo Tiny Front Display: 27" Iiyama ProLite Full HD screen
Accessories	Audio: 1 x Microphone AKG CGN 99 (for reference) Light: 1 x LITTLITE LED BNC lamp (for reference)
Features	Height adjustment: Motorised Pillar 40cm range height Buttons: 2 x Height control (+ Optional: Light and/or Mic mute) Micro PC installation inside working surface Ultra Wide Phone/Tablet holder 1 x Fixed side table (right) 4 x lockable smart castors (default: 50mmØ, enlarged: 75mmØ)

CONNECTIVITY

Top Dashboard	Microphone: up to 2 x 3-pin XLR shock-mounts Work light: 1 x BNC lamp socket, 12 V (optional) USB data: 2 x USB 3.0 Type-A sockets Phone/tablets charging cables: 1 x USB-C, 1 x Lightning
Side Connectivity	Laptop I/O (configurable): 3 x D-size Neutrik cutouts (fitted as specified) Laptop power: 1 x AC socket outlet
Bottom cabling	AC power input. When configured with integrated PC: 1 x HDMI second desktop output for duplicate / extendent view 1 x RJ45/CAT6 LAN. Pass-through cables: up to 2 x XLRs and Laptop I/O per configuration.